

DPU-7000

# G.hn Over Coax Distribution Point Unit (DPU)

## Coaxial DPU (Head-End)

G.hn Wave 2 over Coaxial | Gigabit Ethernet WAN

Comtrend's G.hn Coax DPU is a purpose-built solution designed to unlock gigabit broadband for Multi-Dwelling Units (MDUs).

- **Cost-Effective Fiber Alternative** – Delivers near-symmetrical Gigabit services without the high costs and complexity of fiber retrofits.
- **Leverages Existing Coax Infrastructure** – Avoids disruptive construction while maximizing deployment efficiency.
- **Designed for MDUs** – Ideal for brownfield Multi-Dwelling Units (MDUs), providing a scalable broadband solution.

The DPU-7000 creates a coax-based distribution network, providing a cost-effective alternative to fiber installs. It supports G.hn end point devices like the Comtrend CPE-7000 and residential gateways with G.hn or SFP ports for flexible deployment. As part of a G.hn over coax ecosystem, its head-end supports up to 16 devices, enabling efficient MDU upgrades without costly fiber retrofits.



## KEY BENEFITS



**Access Locked Markets:** Tap into previously inaccessible MDU markets with a cost-effective solution.



**Cost Efficiency:** Avoid high costs associated with fiber rewiring by utilizing existing coaxial cabling.



**Seamless Deployment:** Purpose-built for fast installation with minimal disruption.



**Scalable Network Evolution:** Complement DPU deployments with OpenPON and cost-effective fiber solutions for future growth.

## DPU-7000

### Key Features



G.hn Wave 2  
Technology



Supports up to  
16 Devices



Delivers up to  
1.7Gbps



Intuitive Web  
GUI



TR-069 Remote  
Management




Gigabit Ethernet  
WAN

### Specifications

Hardware	
Ports	1x Port F-connector (G.hn) 1x Port F-Connector (TV Out) 1x Gigabit Ethernet WAN
LED Indicators	Power, LAN, (G.hn) Link
Power Input	DC 12V/1A
Dimensions	133mm (D) x 70mm (W) x 38mm (H)
Uplink	
Gigabit Ethernet (RJ-45)	Built in
G.hn Wave 2 Master	
Standards	Supports ITU-T G.9960/9961/9962/9963/9964 Unified high-speed wireline-based home networking transceivers
Environment	
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	10% ~ 90% non-condensing
Software	
Features	<ul style="list-style-type: none"> <li>Supports Upstream/Downstream bandwidth configuration</li> <li>Supports DHCP client, Fixed IP setting, IPv6 passthrough, 802.1Q Support, Management VLAN, Syslog, SNTP client, Multicasting</li> <li>Supports Web GUI as friendly management Interface</li> <li>TR-069 for remote management</li> </ul>
Certifications	CE, FCC, UL / cUL, ITU-T G.hn Standard

**Application:** Ideal for Small MDUs

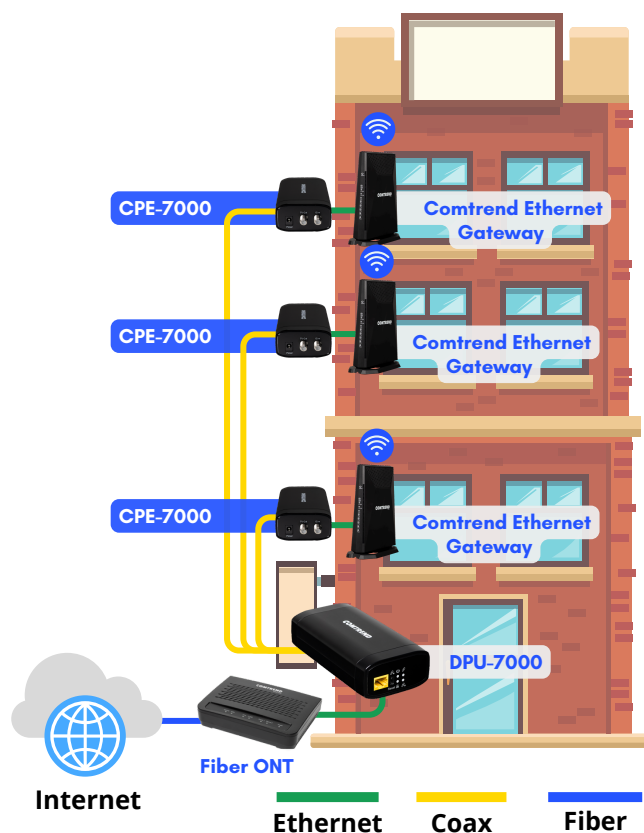

Note: Up to 16 nodes can be used.



**CE Standards:**

EN 55032 / EN 55035 EN  
62368-1 (Includes ERP)

**FCC / IC Standards:**

FCC Part15B / ICES-003  
UL 62368-1 / cUL62368-1