

COMTREND

Quick Installation Guide

GS-7408 | 8-Port Gigabit Ethernet Smart-Lite Switch

I Product Information

I-1. Package Contents


1




2



3



4



1. GS-7408 Switch

2. QIG

3. Power Cable


4. 4 x Foot Pads

I-2. Hardware Overview

Front Panel

The front panel of the switch consists of:


- A Series of LED Indicators

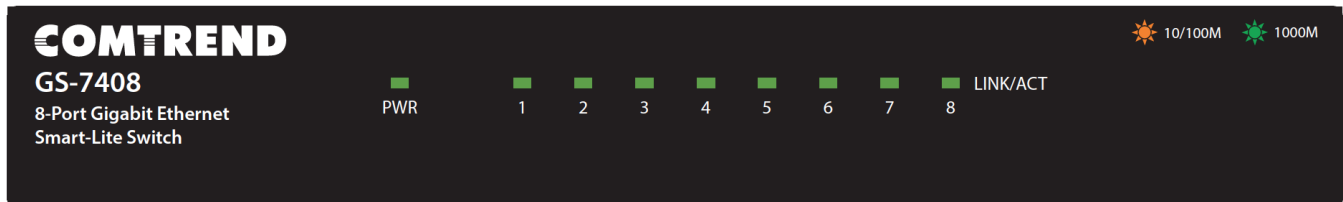

Rear Panel

The rear panel of the switch consists of:

- 8 x 10/100/1000Mbps RJ-45 Ports
- AC Power Connector (DC IN 5V / 1A)
- Reset Button

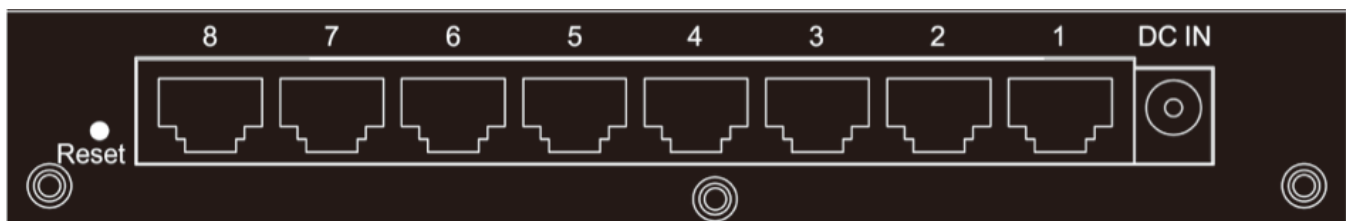

I-3. LED Indicator

PWR:

LED Status	Mode	Description
Green	On	Power on
Off	Off	Power off or fail

Link/ACT:

LED Status	Mode	Description
Green	On/Blinking	1000Mbps connected/data transmitting
Amber	On/Blinking	10/100Mbps connected/data transmitting
Off	Off	Disconnected or fail

I-4. Desktop Installation

Install the switch on a desktop by attaching the cushioning rubber feet to the bottom corners of the switch to protect against external vibration. Allow adequate space for ventilation between the device and any objects around.




Quick Setup

II-1. Switch to End Device

1. Connect the switch to local power with the included power cable.
2. Use a standard Cat 5/5e Ethernet cable to connect the switch to end devices as shown below. Switch ports will automatically adjust to the link rate of the device to which it's connected.


Optionally, any port can be used to uplink to an existing network.

Application Diagram

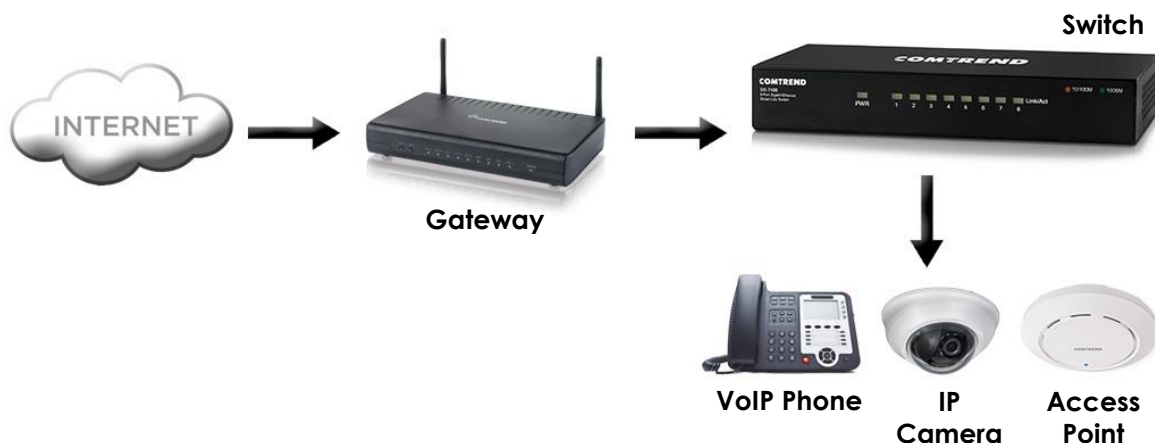

II-2. Login

1. Open a web browser and go to the switch's IP address.
2. Enter the access point's default IP address **192.168.169.1** into the URL bar of a web browser.

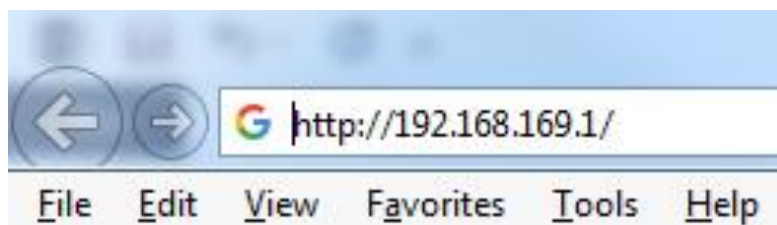


You will be prompted for a username and password. Enter the default username "admin" and the default password "admin".



The image shows the COMTREND User Login page. It features a blue header with the COMTREND logo on the left and "User Login" on the right. Below the header, there are three input fields: "User name" with "admin" entered, "Password" with "****" entered, and "Language" with "English" selected in a dropdown menu. A "Login" button is positioned below the password field. At the bottom left, there is a small copyright notice: "© All rights reserved".

3. You will arrive at the switch configuration window as shown below:

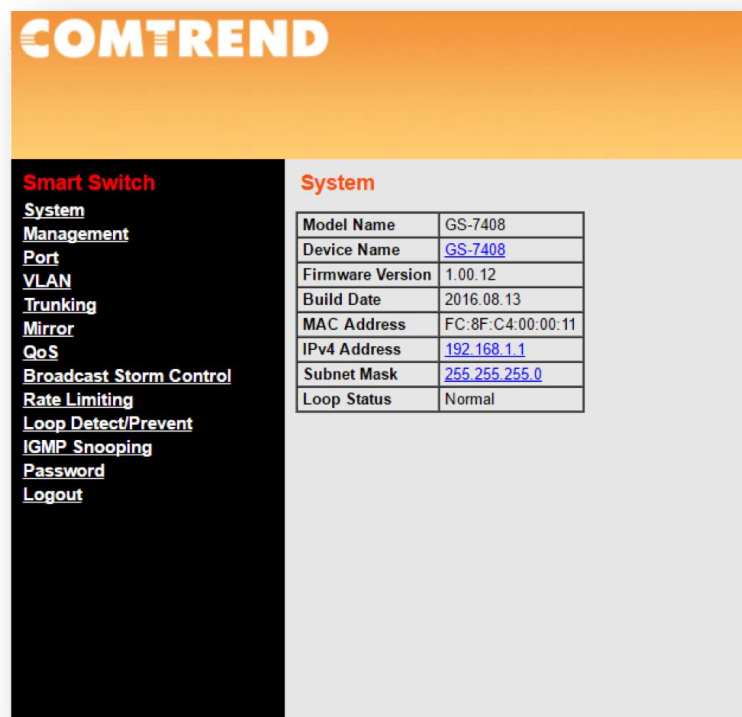

The image shows the COMTREND Smart Switch System configuration window. It has an orange header with the COMTREND logo. On the left, there is a black sidebar with a list of configuration options: **Smart Switch**, **System**, **Management**, **Port**, **VLAN**, **Trunking**, **Mirror**, **QoS**, **Broadcast Storm Control**, **Rate Limiting**, **Loop Detect/Prevent**, **IGMP Snooping**, **Password**, and **Logout**. The main area is titled "System" and contains a table with the following data:

Model Name	GS-7408
Device Name	GS-7408
Firmware Version	1.00.12
Build Date	2016.08.13
MAC Address	FC:8F:C4:00:00:11
IPv4 Address	192.168.1.1
Subnet Mask	255.255.255.0
Loop Status	Normal



Your Device is Now Connected!

FOR MORE HELP: For instructions on advanced features, FAQ, etc., please visit our online Product Webpage.

For more information:

YouTube: <https://www.youtube.com/user/ComtrendConnection>

Facebook: <https://facebook.com/Comtrend>

Website: <http://us.comtrend.com/>

Support: Visit our website or call 1-877-COMTREND (1-877-266-8736)

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio technician for help.

EMC Warning

This equipment complies with EU radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Safety

1. This product is designed for indoor use only; DO NOT install the adapter outdoors.
2. DO NOT put this product at or near hot or humid places, e.g. kitchen or bathroom. DO NOT use any spray or liquids on it.
3. DO NOT touch the product with wet hands and DO NOT clean the product with a wet cloth. Use a soft, dry cloth to clean the device.
4. DO NOT expose the product to lit candles, cigarettes, open flames, high or low temperatures, etc.
5. DO NOT pull any connected cable with force; disconnect it from the power first.
6. Ensure proper ventilation, so that air flows freely around the product.
7. If you find that the product is not working properly, please contact your dealer of purchase and ask for help. Do NOT open the casing
8. DO NOT disassemble the product, warranty will be void.

Supplier's Declaration of Conformity

We

Company: **Comtrend Corporation - North America**

Address: **14 Chrysler, Irvine, CA, 92618**

Certify and declare under our responsibility that the following equipment:

Product Name: **8-Port PoE Gigabit Ethernet Smart-Lite Switch**

Model Name: **GS-7408**

Brand Name: **COMTREND**



Is tested with the declaration described above, and is in conformity with the relevant FCC (Federal Communication Commission) standards, and technical specifications have been applied:

EMC:

47 CFR FCC Rules and Regulations Part 15 Subpart **B** , Class **B** Digital Device

Signature: _____

Printed Name: John Castreje

Departments : Comtrend Corporation - North America

Position: General Manager of North America

E-mail : certify@comtrend.com

Date: 2018/07/02

Notes:

15.19(a)(3) Regulations :

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Class B :

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.