


Quick Install Guide

WR-5930 | AC750 Wireless LAN Dual Band Concurrent Ethernet Router

1 How to Connect

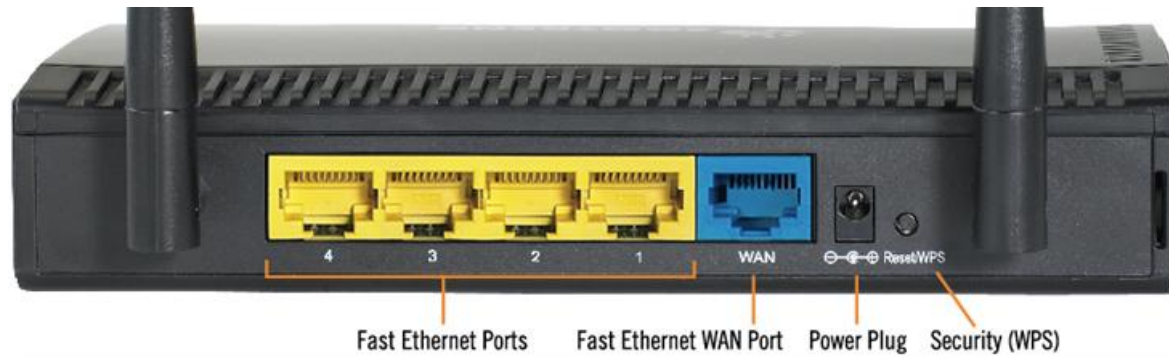

For initial setup, ensure a browser enabled PC/laptop is connected directly to one of the fast Ethernet ports on the router.


2 Basic Setup




1. Type <http://192.168.2.1> into your web browser.
2. Sign in with the default login.
(Username: **admin** and Password: **1234**)



3. Click 'Quick Setup'

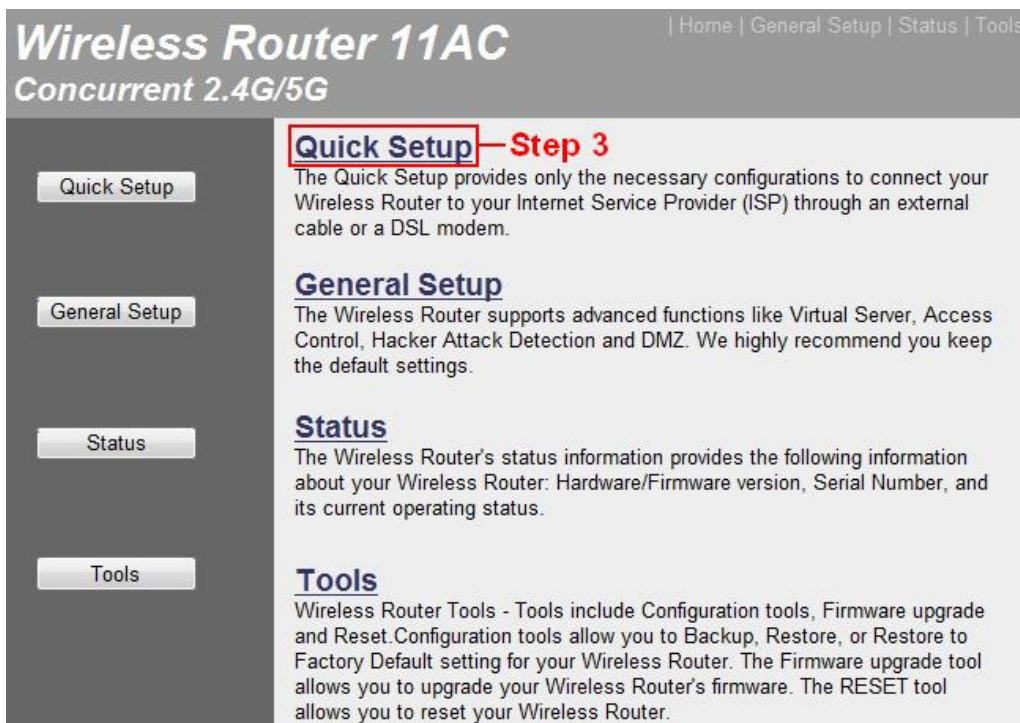

4. Select the time zone of the area where you live, then click 'NEXT'.

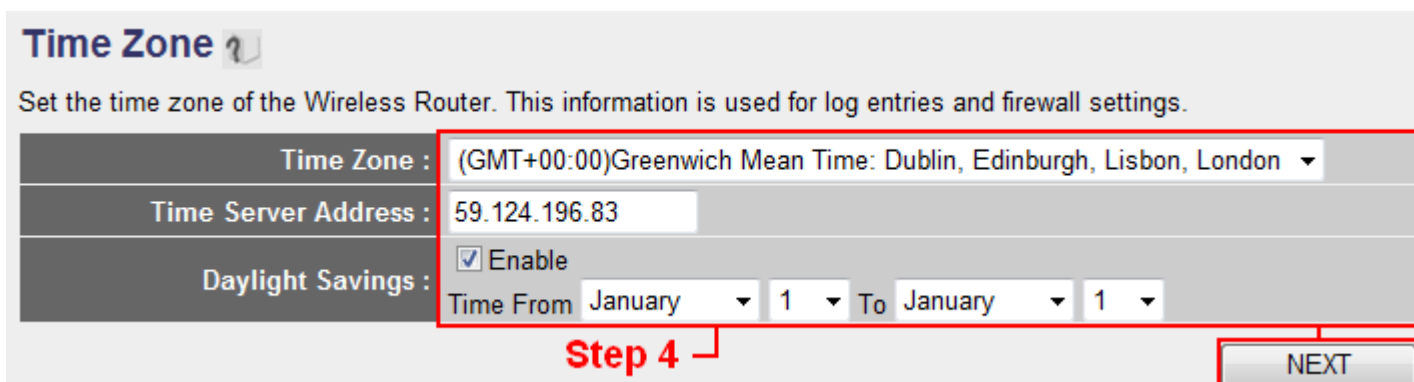

5. Select a broadband type of the Internet connection you're using.

Broadband type
Specify the wan connection type required by your Internet Service Provider. Specify a Cable modem, Fixed-IP xDSL or PPTP xDSL connection

- Cable Modem**
A connection through a cable modem requires minimal configuration. When you set up an account with your Cable provider, the Cable provider and your Wireless Router will automatically establish a connection, so you probably do not need to enter anything more.
- Fixed-IP xDSL**
Some xDSL Internet Service Providers may assign a Fixed IP Address for your Wireless Router. If you have been provided with this information, choose this option and enter the assigned IP Address, Subnet Mask, Gateway IP Address and DNS IP Address for your Wireless Router.
- PPPoE xDSL**
If you connect to the Internet using an xDSL Modem and your ISP has provided you with a Password and a Service Name, then your ISP uses PPPoE to establish a connection. You must choose this option and enter the required information.
- PPTP xDSL**
If you connect to the Internet using an xDSL Modem and your ISP has provided you with a Password, Local IP Address, Remote IP Address and a Connection ID, then your ISP uses PPTP to establish a connection. You must choose this option and enter the required information.
- L2TP xDSL**
Layer Two Tunneling Protocol is a common connection method used in xDSL connections.
- Telstra Big Pond**
If your Internet service is provided by Telstra Big Pond in Australia, you will need to enter your information below. This information is provided by Telstra BigPond.

BACK

Step 5

3. IP Address Info ?
Dynamic IP

Cable Modem

Host Name :

MAC Address : 000000000000

BACK

6a. If you selected Cable Modem (DHCP), just press OK.

3. IP Address Info ?
PPPoE

Enter the User Name and Password required by your ISP in the appropriate fields. If your ISP has provided you with a "Service Name" enter it in the Service Name field, otherwise, leave it blank.

User Name :

Password :

Service Name :

MTU : 1392 (512<=MTU<=1492)

Connection Type : Continuous

Idle Time Out : 10 (1-1000 Minute)

BACK

6b. If you selected PPPoE, type in the DSL gateway's username and password provided by your service provider, then press OK.

7. Click '**APPLY**'. When you see the **System Restarting** message, the router will be ready with new settings within 40 seconds. Upon restarting your router will be ready for use.

Save settings successfully!

Please press APPLY button to restart the system to make the changes take effect.

CONTINUE



System Restarting! Please wait for a while !

OK(40)

3 Enjoy your WiFi!

NOTE: For instructions on advanced features such as customizing your router name, visit our online User Manual:

<http://us.comtrend.com/products/public/product/home-networking/wr-5930.html>



QR code

For more information:

Facebook: <https://facebook.com/Comtrend>

Website: <http://us.comtrend.com/>

Support: Visit our website or call 1-877-COMTREND (1-877-266-8736)

